


LK-SF400 Semi-Flexible Low Loss Cable

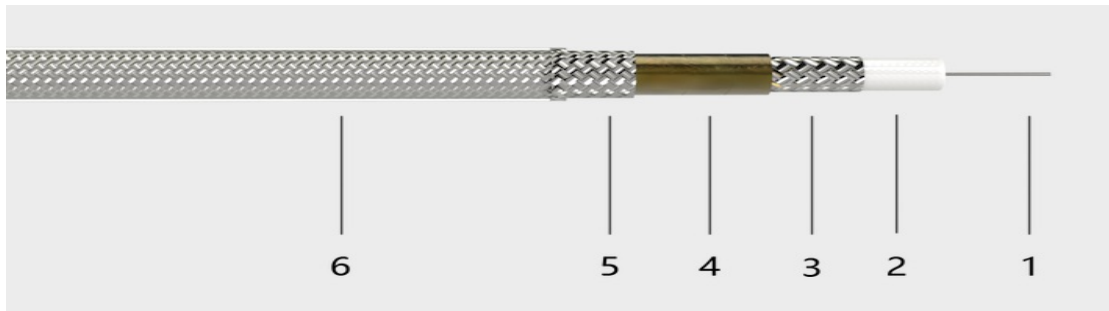

Electrical Characteristic	
PIM3 dBm	120
PIM3 Test Frequency	820MHz-960MHz 1700MHz-1900MHz 1860MHz-2100MHz 2100MHz-2250MHz
Attenuation dB/m	
220MHz	6.1
450MHz	8.9
900MHz	12.8
1.5GHz	16.8
2.5GHz	22.2
3GHz	24.3
5.8GHz	35.5
Loss of Assembly=Loss of Cable+0.06*SQRT(Frequency GHz)	

Mechanical Characteristic	
Weight (kg/100m)	10
Temperature Range (°C)	-40~85
Minimum Bend Radius (mm)	51.5
Bending Life	≥20 cycle

Construction		
1.Inner Conductor (mm)	2.74	Bare Copper Wire or Copper Clad Al wire
2.Insulation		Foamed PE
3.First Outer Shield		Copper Foil
4.Second Outer Shield		Silver-Plated Copper wire Braid Tinned
5.Jacket (mm O.D.)	9.0	Low smoke halogen-free



flame retardant PE or FEP

Standard Connector				
Connector Model	Gender	Type	Shell Material	Frequency Max(GHz)
SMA-M	Male	Straight	Stainless steel	18
SMA-F	Female	Straight	Stainless steel	18
SMA-RA	Male	Right Angel	Stainless steel	18
N-M	Male	Straight	Stainless steel	18
N-F	Female	Straight	Stainless steel	18
N-RA	Male	Right Angel	Stainless steel	18
TNC-M	Male	Straight	Stainless steel	18
TNC-F	Female	Straight	Stainless steel	18

Other Material	
Material Code	
P S	Polyolefin shrink tube cover
E P	Extruded PVC cover
L S	Layered adhesive lined polyolefin shrink tube
RoHS	RoHS compliant cable assembly (per EU directive 2011-65-EU)